




MODEL NO.: YSI-616

YSI FLASH FRONT LOADING STERILIZER

Feature

- Open-type water tank design, easy to clean.
- LED/LCD display all the details of cycle.
- High density filter.
- Fully automatic processor based control.
- High quality vacuum pump.
- Build-in steam generator.
- Optional Printer
- Over temperature and Over pressure protect.
- Double door safety lock.
- Color : Blue.
- Inner chamber made of St. steel 302/304/316.
- Silicon gasket joint less.
- Elegant & safe door locking.

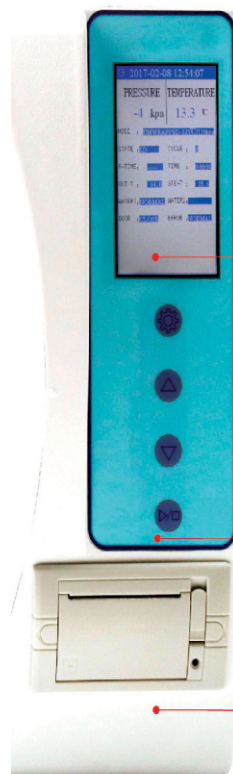

Real-Time Measured Values
Shows real-time values for temperature & pressure & Time & working state.

Cycle Parameter
Parameter settings for temperature, sterilization time & drying time.

Easy Pad
A user- friendly 4 button keypad enables the user to easily browse through the sterilization cycle program setting and use directories.

Thermal Printer
OPTIONAL high quality built-in thermal printer for paper printouts

2017-04-20 16:28		SETTING
Pressure	Temperature	Model
-5 kpa	13.4 °C	Unwrapped : 121°C 110kps
Model :	Unwrapped-121°C/110kpa	Unwrapped : 134°C 210kps
State : LD	Cycle: 5	Wrapped : 121°C 110kps
R-Time :	Time: 0:00:00	Wrapped : 134°C 210kps
Out-T :	14.8 Ste-T: 15.6	Cotton : 121°C 110kps
Water1: Normal	Water2: Normal	Plastic : 121°C 110kps
Door: Closed	Error: Normal	Ster. T : 20
		DryT : 15
		V-count : 01
		Brightness : M
		Language : EN
		O'Clock : 2017-04-20 16:28

YSI-616	
Volume	12L
Chamber Size	Ø200x360mm
Display	LCD
Product Size	560x450x410mm
N.W/G.W.	45/49KG
Printer	Optional

YSI-616	
Volume	18L
Chamber Size	Ø250x350mm
Display	LCD
Product Size	560x450x410mm
N.W/G.W.	48/50KG
Printer	Optional

YSI-616	
Volume	23L
Chamber Size	Ø250x450mm
Display	LCD
Product Size	680x450x410mm
N.W/G.W.	50/55KG
Printer	Optional

PROG	Unwrapped	Unwrapped	Wrapped	Wrapped	Cotton	Plastic	B & D test	Vacuum test
Temp. (°C)	134	121	134	121	121	121	134	105
Pressure (KPA)	210	110	210	110	110	110	210	20
Time (min)	4-20	15-30	4-20	15-30	15-30	15-30	3.5	5

STERILIZATION EQUIPMENT